728m² General Grass & Wildflower Seed Mix
Emorsgate EM5
[Continues on Page 2]

545m2 KILLINGWORTH NATIVE WOODLAND MIX
242No. plants @ 1.5m centres

418m² Shade Tolerant Grass & Wildflower Seed Mix
Emorsgate EH1

3.5m

10m

178m² General Grass & Wildflower Seed Mix
Emorsgate EM5

1m Mow Strips of Amenity Grassland, to be planted either side of pathways

3.5m

474m2 KILLINGWORTH NATIVE WOODLAND MIX
211No. plants @ 1.5m centres

866m² General Grass & Wildflower Seed Mix
Emorsgate EM5

Bat boxes x2
See note 1
Ba

3.5m

402m² General Grass & Wildflower Seed Mix
Emorsgate EM5

67m² Marginal Seed Mix
Emmorsgate EP1

77m2 KILLINGWORTH NATIVE WOODLAND MIX
34No. plants @ 1.5m centres

1775m2 KILLINGWORTH NATIVE WOODLAND MIX
789No. plants @ 1.5m centres

425m2 KILLINGWORTH NATIVE WOODLAND MIX
189No. plants @ 1.5m centres

Sign

B

B

B

163m2 KILLINGWORTH NATIVE WOODLAND MIX
72No. plants @ 1.5m centres

Bird box x1
See note 3
Bi

Bird box x2
See note 6
Bi

DG

DG

Mast

N

KEY

- Balancing Pond Area
- Existing Water Bodies
- General Hard Standing
- Existing & Retained Trees
  Indicative Layout. Refer to Arboricultural Information, prepared by Woodsman Arboricultural Consultancy.
- Existing Shrubs
  Indicative Layout. To be surveyed to identify vegetation worthy of retention.
- Existing Areas of Grassland

Proposed Soft Works

- Approximate Area of Tree Removal
- Woodland Mix
- Specimen Tree
- Native Shrub Mixes
- Ornamental Mixed Shrubs
- General Grass & Wildflower Seed Mix
  Sown with Emmorsgate: EM5 – MEADOW MIXTURE FOR LOAMY SOILS @ 4g/m²
- Marginal Seed Mix
  Sown with Emmorsgate: EP1 – POND EDGE MIXTURE @ 4g/m²

- Shade Tolerant Grass & Wildflower Seed Mix
  Sown with Emmorsgate: EH1 – HEDGEROW MIXTURE @ 4g/m²
- Proposed Amenity Grass
- Bird Box Locations (Bi)
  Types and accurate locations to be agreed with the Council and Project Ecologist on site. See notes on drawing SHF.442.001.L.D.002
- Bat Box Locations (Ba)
  Types and accurate locations to be agreed with the Council and Project Ecologist on site. See notes on drawing SHF.442.001.L.D.002
- Proposed Signage and Information (Sign)
  Details to be agreed.
- Relocated Park Benches
  Situated upon 1.2m x 3m hardstanding. Details to be agreed.
- Relocated Picnic Benches (B)
- Proposed Bins
  Details to be agreed.

General Notes

- For details of Species, amounts and spacing, Refer to Plant Schedule.
- For details of Landscape Management, refer to relevant reports.
- Seed mixes to be planted in accordance with manufacturer's/suppliers guidance, where applicable. Refer to relevant product sheets for further information.
- Refer to Engineer's proposals for level and drainage information.
- Refer to Woodsman Tree Protection Plan for details of trees to be removed and retained and their associated protection measures.
- All proposed planting adjacent to existing vegetation to be overseen by appointed Arboriculturalist.
- Routes of Footpaths and hard surfacing to be decided with reference to Root Protection Areas of retained trees, and approved by appointed arboriculturalist.
- Details of bird and bat boxes to be confirmed and agreed with the appointed ecologist.
- Drawing units are measured in m unless otherwise stated.

0m 5m 10m 20m 40m

LOCATION PLAN - NTS

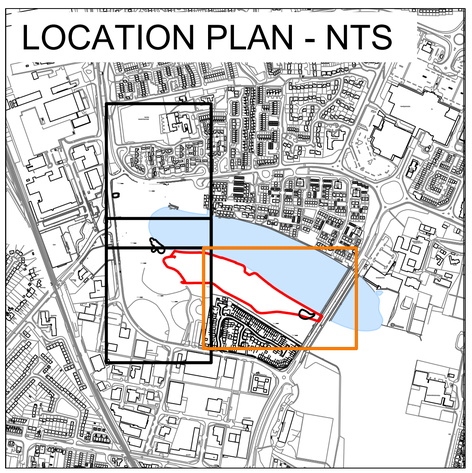

enzygo environmental consultants

REVISION DETAILS

REV	DATE	BY	NOTES
-	18.07.18	WH	Date Created.
A	26.07.18	WH	Minor amends, plan removed, planting added.
B	14.09.18	WH	Minor amends.
C	01.10.18	TR	Amendments to tree planting
D	09.10.18	TR	Minor amendments
E	18.10.18	TR	Minor amendments
F	24.10.18	TR	Minor amendments

SCALE	1:500 @ A1	PROJECT NO.	SHF.442.001
DATE	Oct 2018	DRAWING NO.	SHF.442.001.L.D.003.F
DRAWN	WH	CHECKED	CG

PROJECT: Killingworth Lake, North Tyneside

DRAWING TITLE: Planting Plan - Page 3 of 3 - Rev F

CLIENT: Stantec UK Ltd.