


North Seaton Road - Rainwise Sewerage Upgrade

Estimated start date: April 2019

Estimated completion date: March 2020

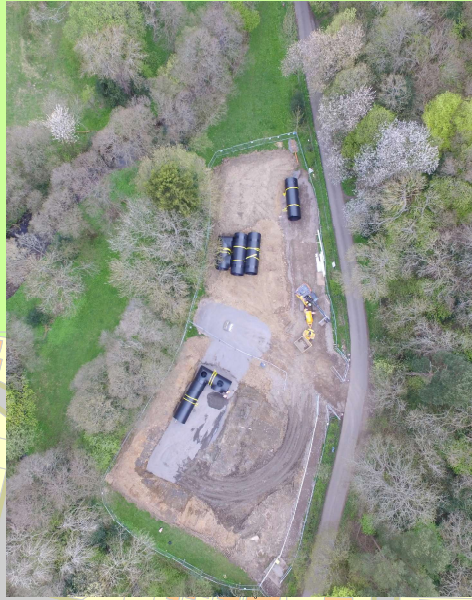

A - Storage Pipework

Three lanes of surface water storage pipework will be laid beneath the field adjacent to North Seaton Road. These pipes are 1200mm in diameter, laid at a depth of around 2m.



B - Pipework and Manholes

370m of new pipework and manholes will be constructed within the highway in North Seaton road at a depth of around 2m. Pipe diameters are between 225mm and 450mm.

NEW PIPEWORK

Rev.	Date	Drawn	Description	CHK'd	App'd
A	28/11/19		First Issue		

MMB
MOTT MACDONALD
BENTLEY



Title
**NORTH SEATON ROAD
CUSTOMER INFORMATION**

Designed	DH	Eng. CHK.			
Drawn	DH	Coordination			
Eng. CHK.		Approved			
Scale at A3	NTS	Project	Ashington Rainwise	Status	PRE
Drawing Number		Mapinfo file	MapInfo\Workspaces	Rev	P1

BASED UPON THE ORDINANCE SURVEY MAP WITH THE PERMISSION OF THE CONTROLLER OF HMSC CROWN COPYRIGHT RESERVED LICENSE NO. 100026761